


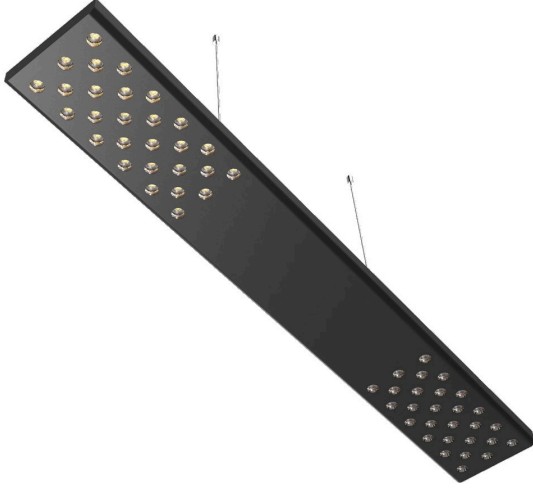

A 1000 × 150 mm linear pendant with a slim 27 mm black body and two groups of Ø18 mm lens optics.

POWER
33 W

LUMINOUS FLUX
3,036 lm

EFFICACY
92 lm/W

COLOUR
RENDERING
Ra > 80

IP RATING
IP20

WARRANTY
3 years

IP
20

CE




CRI>80

KEY FEATURES

- Two groups of Ø18 mm lens spot optics
- Slim 27 mm, 1000 × 150 mm black body
- Suspension length to suit the project
- 10°, 25°, 40° and 60° beam angle options
- 33 W, 3036 lm (92 lm/W), 2700–6500 K colour temperature options

DIMENSIONS (MM)

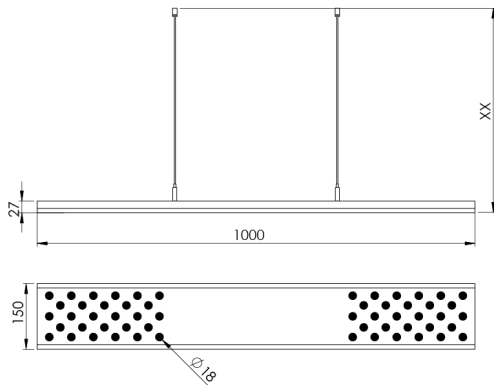

TECHNICAL DATA

Electrical class	Class I
IP rating	IP20
Housing	Electrostatic powder-coated metal body
Mounting	Pendant
LED type	SMD high-power LED
Optics	High-efficiency lens
Input voltage	220–240 V AC
LED lifetime	50,000 h
Dimensions	1000 × 150 × 27 mm
Weight	3.2 kg
Warranty	3 years

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 LN SR 001-33-830		33 W	3,036 lm	92 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

2700K

3000K

4000K

5000K

6500K

BEAM ANGLE



10°



25°



40°



60°

MOUNTING



Pendant

HOUSING COLOUR



03 Black



Up-to-date information and all options

<https://harmonyels.com/en/product/dotto-100>