


Filo Polycarbonate Vapour-Proof Luminaire

Product code: 20 01 IC ET 004

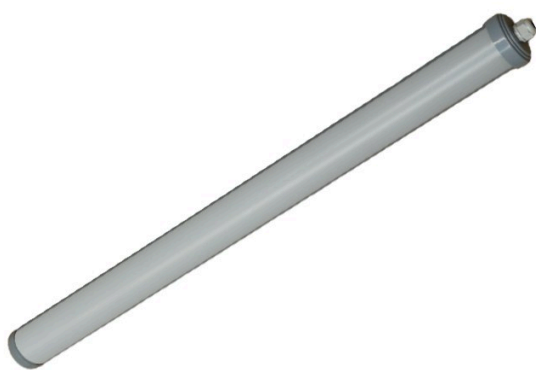

Filo Polycarbonate Vapour-Proof Luminaire is a vapour-proof LED luminaire. A very slim IP65 vapour-proof luminaire with a polycarbonate body; 18–40 W, 100 lm/W, optional PIR sensor. With extruded polycarbonate body, white (RAL 9016) and uV-stabilised PC opal diffuser, it offers IP65 protection, Ra>80 colour rendering and 4000K / 6500K colour temperatures. It is used in car parks, warehouses, factories, kitchens and damp or dusty areas; it comes with a 3-year warranty.

POWER

18–40 W

LUMINOUS FLUX

**1,800–4,000
lm**

EFFICACY

100 lm/WCOLOUR
RENDERING**Ra > 80**

IP RATING

IP65


WARRANTY

3 years**IP
65****CE****-10 / +65 °C****CRI>80**

KEY FEATURES

- Slim 30 × 50 mm polycarbonate body, IP65
- UV-stabilised PC opal diffuser, UGR < 20
- 18, 36 and 40 W; 600 and 1200 mm
- Class II, white body (RAL 9016)
- Optional PIR sensor

DIMENSIONS (MM)

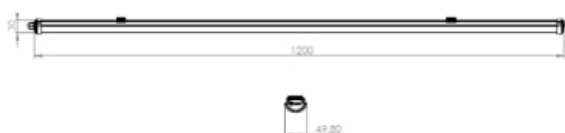

TECHNICAL DATA

Electrical class	Class II
IP rating	IP65
Housing	Extruded polycarbonate body, white (RAL 9016)
Mounting	Surface-mounted
LED type	SMD mid-power LED
LED	Samsung, Bridgelux, Lumileds, Ledvance
Optics	UV-stabilised PC opal diffuser
Glare	UGR < 20
Input voltage	220–230 V AC / 50 Hz
Ambient temperature	-10 / +65 °C
LED lifetime	50,000 h
Dimensions	600–1200 × 30 × 50 mm
Weight	0.24 kg
Warranty	3 years

Filo Polycarbonate Vapour-Proof Luminaire

Product code: 20 01 IC ET 004

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 IC ET 004-18-840	Samsung, Bridgelux, Lumileds, Ledvance	18 W	1,800 lm	100 lm/W	4000K	Ra > 80
20 01 IC ET 004-36-840	Samsung, Bridgelux, Lumileds, Ledvance	36 W	3,600 lm	100 lm/W	4000K	Ra > 80
20 01 IC ET 004-40-840	Samsung, Bridgelux, Lumileds, Ledvance	40 W	4,000 lm	100 lm/W	4000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

☒ 4000K☐ 6500K

MOUNTING



Surface

DRIVER AND CONTROL

☒ Standard driver (on/off)

HOUSING COLOUR

☒ 01 White