



A 2000 mm decorative pendant with a Ø24 mm flexible LED neon body wound around a Ø32 mm carrier profile.

POWER
14 W/m

LUMINOUS FLUX
1,008 lm/m

EFFICACY
72 lm/W

COLOUR
RENDERING
Ra > 80

IP RATING
IP54

WARRANTY
3 years

IP
54

CE




CRI>80

KEY FEATURES

- Ø24 mm flexible LED neon wound in a spiral around a Ø32 mm carrier profile
- 2000 mm long, suspended at two points
- Suspension length to suit the project
- 360° beam angle, 14 W and 1008 lm per metre
- IP54, Class III, 24 V DC external driver

DIMENSIONS (MM)

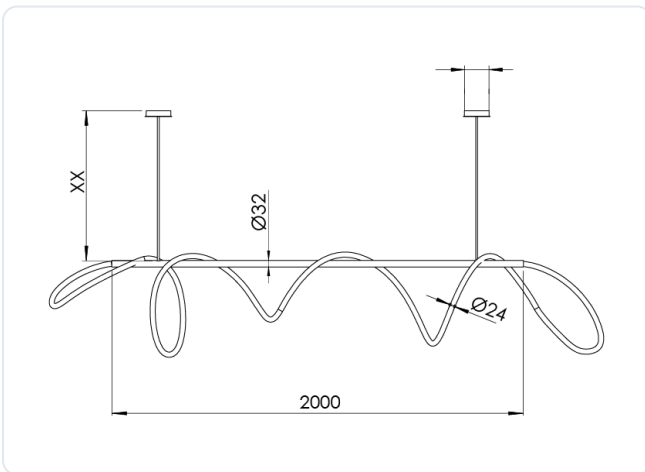

TECHNICAL DATA

Electrical class	Class III
IP rating	IP54
Housing	Metal body
Mounting	Pendant
LED type	SMD mid-power LED
Optics	Extruded silicone diffuser
Input voltage	24 V DC (harici sürücü)
LED lifetime	50,000 h
Dimensions	2000 mm
Weight	10.6 kg
Warranty	3 years

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 LN DE 017-14-830		14 W/m	1,008 lm/m	72 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

3000K

BEAM ANGLE



360°

MOUNTING



Pendant



Up-to-date information and all options

<https://harmonyels.com/en/product/flexa-spiral>