HARMONY
Energy Lighting Solutions

LED TRACK SPOTLIGHT

Focus Dikey

Product code: 10 01 IC RS 001



Focus Dikey is a track-mounted LED spotlight delivering 30–41 W of power and 2801–4830 lm of luminous flux. With a die-cast aluminium housing and an aluminium reflector, it offers Ra>80 (optional Ra>90) colour rendering, 2700K–6500K and Tunable White colour temperatures and DALI/Switch DIM/Triac control. It is used on lighting track for product and wall accents in shops, showrooms, galleries and museums and comes with a 3-year warranty.

POWER	LUMINOUS FLUX	EFFICACY
30–41 W	**2,801–4,830 lm**	**93–118 lm/W**


COLOUR RENDERING	WARRANTY
Ra > 80 / 90	**3 years**

CE | CRI>80 | CRI>90

KEY FEATURES

- Die-cast aluminium housing for high durability and long life
- Mechanically locking joint: 90° vertical and 350° horizontal aiming
- High-impact tempered glass
- Very narrow, narrow, medium, wide and very wide reflector options
- Honeycomb louvre and colour filter accessories
- Universal adaptor for single- and three-phase track

DIMENSIONS (MM)

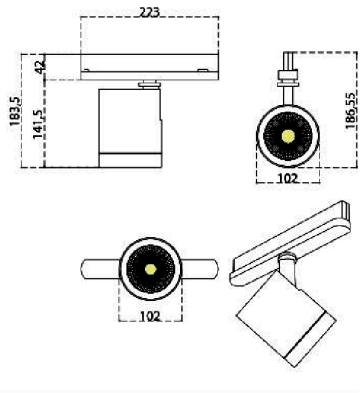

TECHNICAL DATA

Electrical class	Class II
Housing	Die-cast aluminium
Mounting	Track (single/three-phase)
LED type	COB LED
LED	Samsung, Bridgelux, Lumileds
Optics	Aluminium reflector, 5 beam angles
Driver	Philips, Osram, Tridonic, Eaglerise, Lifud
Input voltage	220–240 V AC / 50–60 Hz
LED lifetime	50,000 h (L80B10)
Weight	2.1 kg
Warranty	3 years
Origin	Türkiye

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com

HARMONY
Energy Lighting Solutions

LED TRACK SPOTLIGHT

Focus Dikey

Product code: 10 01 IC RS 001

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
10 01 IC RS 001-30-830	Samsung, Bridgelux, Lumileds	30 W	3,290 lm	110 lm/W	3000K	Ra > 80
10 01 IC RS 001-30-930	Samsung, Bridgelux, Lumileds	30 W	2,801 lm	93 lm/W	3000K	Ra > 90
10 01 IC RS 001-30-840	Samsung, Bridgelux, Lumileds	30 W	3,426 lm	114 lm/W	4000K	Ra > 80
10 01 IC RS 001-30-940	Samsung, Bridgelux, Lumileds	30 W	2,953 lm	98 lm/W	4000K	Ra > 90
10 01 IC RS 001-41-830	Samsung, Bridgelux, Lumileds	41 W	4,640 lm	113 lm/W	3000K	Ra > 80
10 01 IC RS 001-41-930	Samsung, Bridgelux, Lumileds	41 W	3,890 lm	95 lm/W	3000K	Ra > 90
10 01 IC RS 001-41-840	Samsung, Bridgelux, Lumileds	41 W	4,830 lm	118 lm/W	4000K	Ra > 80
10 01 IC RS 001-41-940	Samsung, Bridgelux, Lumileds	41 W	4,210 lm	103 lm/W	4000K	Ra > 90

CUSTOMISATION

COLOUR TEMPERATURE

2700K | 3000K | 3500K | 4000K | 5000K | 5700K | 6500K | Tunable White

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- Switch DIM
- Triac
- Emergency kit, 1 hour
- Emergency kit, 3 hours

BEAM ANGLE



MOUNTING



Track

AIMING



ACCESSORIES



Honeycomb louvre | Barn doors

HOUSING COLOUR

- **01** White
- **03** Black
- **04** Grey
- **06** Any RAL colour

Up-to-date information and all options
https://harmonyels.com/en/product/focus-dikey