HARMONY
Energy Lighting Solutions

LED TRACK SPOTLIGHT

Focus Soket

Product code: 10 01 IC RS 002



Focus Soket is a track-mounted LED spotlight delivering 30–41 W of power and 2801–4830 lm of luminous flux. With a die-cast aluminium housing and an aluminium reflector, it offers Ra>80 (optional Ra>90) colour rendering, 2700K–6500K and Tunable White colour temperatures and DALI/Switch DIM/Triac control. It is used on lighting track for product and wall accents in shops, showrooms, galleries and museums and comes with a 3-year warranty.


WARRANTY
3 years

CE

KEY FEATURES

- Housing with die-cast aluminium heat sink
- High-purity aluminium ball-shape reflector
- Narrow, medium and wide-beam reflector options
- Aluminium profile driver box
- Track adaptor with on-board driver
- Tempered protective glass

DIMENSIONS (MM)

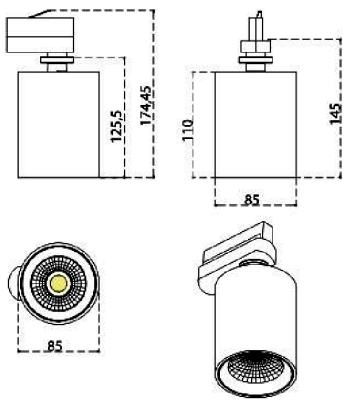

TECHNICAL DATA

Electrical class	Class II
Housing	Die-cast aluminium
Mounting	Track (single/three-phase)
LED type	COB LED
LED	Samsung, Bridgelux, Lumileds
Driver	Philips, Osram, Tridonic, Eaglerise, Lifud
Input voltage	220–240 V AC / 50–60 Hz
LED lifetime	50,000 h (L80B10)
Warranty	3 years
Origin	Türkiye

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com

HARMONY
Energy Lighting Solutions

Focus Soket

Product code: 10 01 IC RS 002

CUSTOMISATION

COLOUR TEMPERATURE

2700K | 3000K | 3500K | 4000K | 5000K | 5700K | 6500K | Tunable White

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- Switch DIM
- Triac
- Emergency kit, 1 hour
- Emergency kit, 3 hours

BEAM ANGLE



MOUNTING


Track

HOUSING COLOUR

01 White
03 Black
04 Grey
06 Any RAL colour

Up-to-date information and all options
https://harmonyels.com/en/product/focus-soket

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com