



A 10 W, black pendant luminaire for 48 V magnetic track systems, with Osram / Bridgelux LEDs and on/off, DALI or Tuya wireless control.

POWER
10 W

LUMINOUS FLUX
**1,000–1,240
lm**

EFFICACY
100–124 lm/W

COLOUR
RENDERING
Ra > 80

WARRANTY
3 years

CRI>80


KEY FEATURES

- Fits 48 V magnetic track; can be positioned anywhere along the track
- Pendant cylinder housing, 24° beam angle
- Osram / Bridgelux LEDs, black housing
- On/off, DALI and Tuya wireless (Wi-Fi / Bluetooth) control options
- Smart CCT option: colour temperature adjustable from 3000 to 6500 K
- Ra > 80 as standard; Ra > 90 on request

TECHNICAL DATA

Mounting	Magnetic track (48 V)
LED	Osram, Bridgelux
Input voltage	48 V DC (harici manyetik ray sürücüsü)
Dimensions	Ø50 × 135.5 mm
Warranty	3 years

DIMENSIONS (MM)

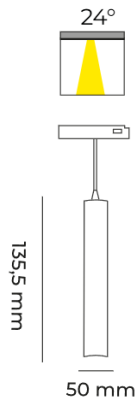

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 IC MG 008-10-830	Osram, Bridgelux	10 W	1,200 lm	120 lm/W	3000K	Ra > 80
20 01 IC MG 008-10-840	Osram, Bridgelux	10 W	1,240 lm	124 lm/W	4000K	Ra > 80
20 01 IC MG 008-10-8TW	Osram, Bridgelux	10 W	1,000 lm	100 lm/W	Tunable White	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

3000K

4000K

Tunable White

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- Wireless control

BEAM ANGLE



24°

MOUNTING



Magnetic
track

HOUSING COLOUR



03 Black



Up-to-date information and all options

<https://harmonyels.com/en/product/lyra-drop>