



A 40 W, 1205 mm black linear luminaire for 48 V magnetic track systems, with Osram / Bridgelux LEDs and on/off, DALI or Tuya wireless control.

POWER
40 W

LUMINOUS FLUX
4,800 lm

EFFICACY
120 lm/W

COLOUR
RENDERING
Ra > 80


WARRANTY
3 years

CRI>80

KEY FEATURES

- Fits 48 V magnetic track; can be positioned anywhere along the track
- Slim linear housing (22 × 43 mm section)
- Osram / Bridgelux LEDs, black housing
- On/off, DALI and Tuya wireless (Wi-Fi / Bluetooth) control options
- Ra > 80 as standard; Ra > 90 on request

DIMENSIONS (MM)

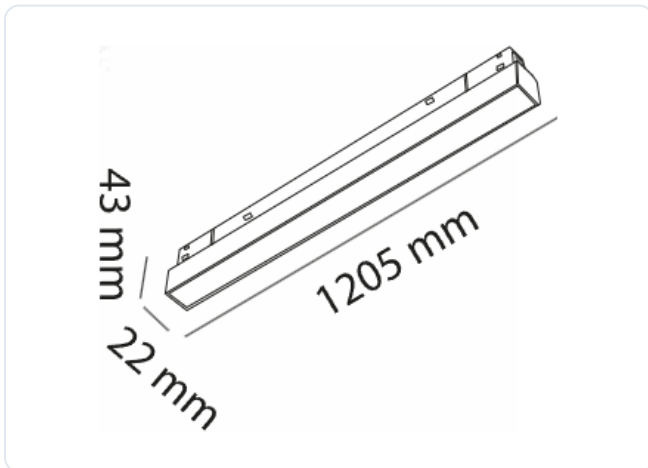

TECHNICAL DATA

Mounting	Magnetic track (48 V)
LED	Osram, Bridgelux
Input voltage	48 V DC (harici manyetik ray sürücüsü)
Dimensions	1205 × 22 × 43 mm
Warranty	3 years

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 IC MG 004-40-830	Osram, Bridgelux	40 W	4,800 lm	120 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

3000K

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- Wireless control

MOUNTING



Magnetic
track

HOUSING COLOUR

■ 03 Black



Up-to-date information and all options

<https://harmonyels.com/en/product/lyra-line-120>