



Mini-K 95 Kare is a recessed LED spotlight. With a die-cast aluminium housing and an aluminium reflector, it offers IP20 protection, Ra>80 (optional Ra>90) colour rendering, 2700K–6500K and Tunable White colour temperatures and DALI/1-10V/Switch DIM/Triac/wireless control. It is used for general and accent lighting in suspended ceilings of offices, shops, hotels and homes and comes with a 3-year warranty.

IP RATING

IP20

WARRANTY

3 years

IP
20


CE



KEY FEATURES

- Housing with die-cast aluminium heat sink
- High-purity aluminium ball-shape reflector
- Electrostatic powder coated

DIMENSIONS (MM)

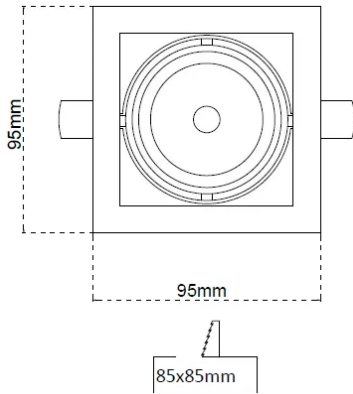

TECHNICAL DATA

Electrical class	Class II
IP rating	IP20
Housing	Die-cast aluminium
Mounting	Recessed
LED	Samsung, Bridgelux, Lumileds
Driver	Philips, Osram, Tridonic, Eaglerise, Lifud
Input voltage	220–240 V AC / 50–60 Hz
LED lifetime	50,000 h (L80B10)
Dimensions	95x95
Cut-out	85 × 85 mm
Warranty	3 years
Origin	Türkiye

CUSTOMISATION

COLOUR TEMPERATURE

- 2700K 3000K 3500K 4000K 5000K
5700K 6500K Tunable White

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- 1-10V
- Switch DIM
- Triac
- Wireless control
- Emergency kit, 1 hour
- Emergency kit, 3 hours

MOUNTING



Recessed

HOUSING COLOUR

- 01 White 03 Black 04 Grey 06 Any RAL colour



Up-to-date information and all options

<https://harmonyels.com/en/product/mini-k-95-kare>