



An IP66 outdoor linear wallwasher; 10–36.5 W, lengths from 345 to 1195 mm and a $\pm 90^\circ$ adjustable bracket.

POWER

10–36.5 W

LUMINOUS FLUX

**1,200–4,380
lm**

EFFICACY

120 lm/W

COLOUR
RENDERING

Ra > 80

IP RATING

IP66

WARRANTY

3 years

IP
66

CE




CRI>80

KEY FEATURES

- IP66 outdoor linear luminaire for facade and wall washing
- $\pm 90^\circ$ adjustable mounting bracket
- 10°, 25°, 40° and 60° beam angle options
- 120 lm/W efficacy, 5 lengths from 345 to 1195 mm
- switchDIM; DALI dimming on 10, 15 and 20 W
- Anodised aluminium extrusion body, tempered glass

DIMENSIONS (MM)

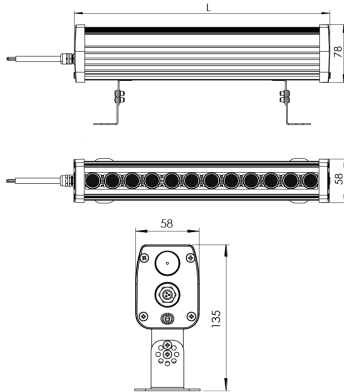

TECHNICAL DATA

Electrical class	Class I
IP rating	IP66
Housing	Anodised aluminium extrusion body, tempered glass
Mounting	Wall
LED type	SMD high-power LED
Optics	High-efficiency acrylic lens
Input voltage	220–240 V AC
LED lifetime	50,000 h
Dimensions	58 × 78 mm
Warranty	3 years

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 DC WW 001-10-830		10 W	1,200 lm	120 lm/W	3000K	Ra > 80
20 01 DC WW 001-15-830		15 W	1,800 lm	120 lm/W	3000K	Ra > 80
20 01 DC WW 001-20-830		20 W	2,400 lm	120 lm/W	3000K	Ra > 80
20 01 DC WW 001-30-830		30 W	3,600 lm	120 lm/W	3000K	Ra > 80
20 01 DC WW 001-36.5-830		36.5 W	4,380 lm	120 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

2700K

3000K

4000K

5000K

6500K

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- Switch DIM

BEAM ANGLE



10°



25°



40°



60°

MOUNTING



Wall



Up-to-date information and all options

<https://harmonyels.com/en/product/nebo>