



A 1500 mm, 54 W IP65 linear wallwasher for facade and wall washing, with narrow, medium and wide beams and white or coloured light.

POWER

54 W

LUMINOUS FLUX

**6,300–7,725
lm**

EFFICACY

117–143 lm/W

COLOUR
RENDERING

Ra > 80

IP RATING

IP65

WARRANTY

3 years

IP
65

CE




CRI>80

KEY FEATURES

- IP65 linear luminaire for facade, column and wall washing
- 54 W, 6,300 lm at 3000K; 1500 mm long
- Narrow 30°, medium 45° and wide 60° beam angles
- 3000K, 4000K, 6500K, RGB and amber, red, green, blue, pink, turquoise
- With adjustable mounting bracket or without
- On-off or DALI driver

DIMENSIONS (MM)

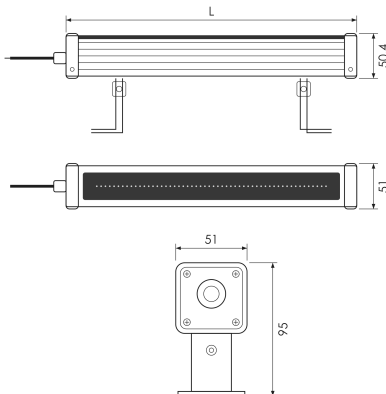

TECHNICAL DATA

Electrical class	Class I
IP rating	IP65
Housing	Aluminium extrusion profile body, end caps
Mounting	Wall
LED type	SMD mid-power LED
LED	Samsung
Optics	Polycarbonate protective cover; narrow, medium and wide beam lenses
Driver	Philips, Osram, Tridonic, Eaglerise, Lifud
Input voltage	220–240 V AC
LED lifetime	50,000 h
Dimensions	1500 × 51 × 50.4 mm
Warranty	3 years
Origin	Türkiye

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
10 01 DC WW 009-54-830	Samsung	54 W	6,300 lm	117 lm/W	3000K	Ra > 80
10 01 DC WW 009-54-840	Samsung	54 W	6,750 lm	125 lm/W	4000K	Ra > 80
10 01 DC WW 009-54-865	Samsung	54 W	7,725 lm	143 lm/W	6500K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

3000K

4000K

6500K

RGB

green, red, amber, blue

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI

BEAM ANGLE



30°




45°



60°

MOUNTING



Wall

HOUSING COLOUR



04 Grey



Up-to-date information and all options

<https://harmonyels.com/en/product/nova-1500>