HARMONY
Energy Lighting Solutions

DECORATIVE LED LINEAR LUMINAIRE

Quadra Line

Product code: 10 01 LN DE 006



Quadra Line is a square decorative linear LED luminaire. With an extruded aluminium housing and a prismatic diffuser, it offers IP20 protection, Ra>80 (optional Ra>90) colour rendering, UGR<19 low glare, 2700K–6500K and Tunable White colour temperatures and DALI/1-10V/Switch DIM/Triac/wireless control. It is used to create architectural accents in lobbies, offices, shops and showrooms and comes with a 3-year warranty.

POWER	LUMINOUS FLUX	EFFICACY
21.4–30 W/m	**1,491–2,525 lm/m**	**69–85 lm/W**


COLOUR RENDERING	IP RATING	WARRANTY
Ra > 80 / 90	**IP20**	**3 years**

IP 20 · CE · CRI>80 · CRI>90

KEY FEATURES

- Aluminium profile housing
- Acrylic with opal or prismatic diffuser
- Electrostatic powder coated
- High-efficiency, low-glare (UGR < 19) diffuser with even light
- Surface, pendant and recessed mounting options

DIMENSIONS (MM)

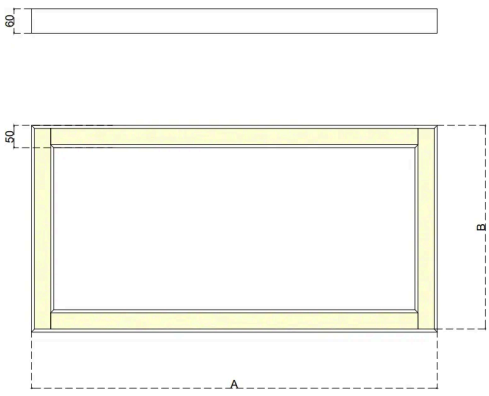

TECHNICAL DATA

Electrical class	Class II
IP rating	IP20
Housing	Extruded aluminium, steel sheet
Mounting	Recessed, Surface-mounted, Pendant
LED	Samsung, Bridgelux, Lumileds
Glare	UGR < 19
Driver	Philips, Osram, Tridonic, Eaglerise, Lifud
Input voltage	220–240 V AC / 50–60 Hz
LED lifetime	50,000 h (L80B10)
Dimensions	Project-specific dimensions; total power = power per metre × total profile length
Warranty	3 years
Origin	Türkiye

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com

HARMONY
Energy Lighting Solutions

DECORATIVE LED LINEAR LUMINAIRE

Quadra Line

Product code: 10 01 LN DE 006

LIGHT AND POWER OPTIONS

Code	Power	Current	830 3000K · Ra>80	840 4000K · Ra>80	930 3000K · Ra>90	940 4000K · Ra>90
10 01 LN DE 006-21	21.4 W/m	250 mA	1,723	1,820	1,491	1,568
10 01 LN DE 006-30	30 W/m	350 mA	2,390	2,525	2,068	2,176

Luminous flux (lm) /m. The colour code is added to the end of the order code (e.g. -840): the first digit is colour rendering (8 = Ra>80, 9 = Ra>90), the last two are colour temperature (30 = 3000K, 40 = 4000K).

CUSTOMISATION

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K · 5700K · 6500K · Tunable White

DRIVER AND CONTROL

- Standard driver (on/off)
- DALI
- 1-10V
- Switch DIM
- Triac
- Wireless control
- Emergency kit, 1 hour
- Emergency kit, 3 hours

MOUNTING



Recessed · Surface · Pendant

HOUSING COLOUR

01 White
03 Black
04 Grey
06 Any RAL colour

Up-to-date information and all options
https://harmonyels.com/en/product/quadra-line

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com