



A 10 W in-ground LED luminaire with a Ø206 mm 316L stainless steel flange, rated IP67 and IK10, with 12 mm tempered glass and lens options.

POWER

10 W

LUMINOUS FLUX

1,000 lm

EFFICACY

100 lm/W

COLOUR
RENDERING

Ra > 80

IP RATING

IP67


IP
67

CRI>80

KEY FEATURES

- IP67 and IK10 rated in-ground luminaire
- 316L stainless steel flange, aluminium injection body
- 12 mm tempered glass
- Extra narrow, medium, wide, elliptical and asymmetric lens options
- White (3000K / 4000K / 6500K) and colour: red, green, blue, amber and RGB (12 V DC)
- Ø156 × 128 mm plastic injection installation box, underwater cable joint

DIMENSIONS (MM)

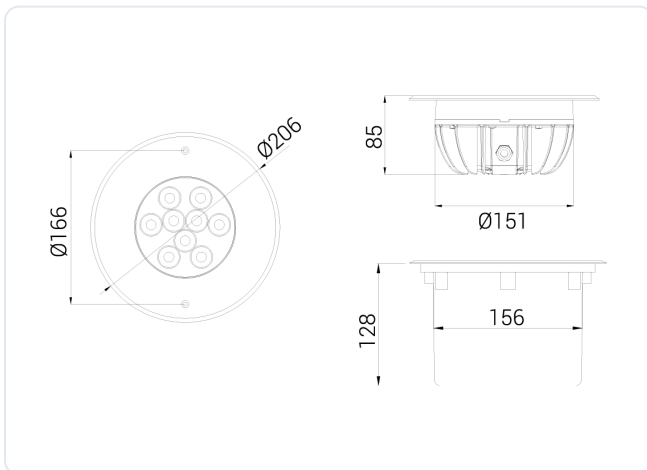

TECHNICAL DATA

IP rating	IP67
Impact resistance	IK10
Housing	Electrostatic powder-coated aluminium injection body, 316L stainless steel flange
Mounting	In-ground
Optics	12 mm tempered glass, lens options
Input voltage	220–240 V AC
Dimensions	Ø206 × 85 mm
Weight	2.8 kg

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 DC GM 002-10-865		10 W	1,000 lm	100 lm/W	6500K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

3000K

4000K

6500K

RGB

green, red, amber, blue

MOUNTING



In-ground



Up-to-date information and all options

<https://harmonyels.com/en/product/terra-206>