

# Tondo Surface-Mounted Luminaire 2

Product code: 20 01 IC SU 010



Tondo Surface-Mounted Luminaire 2 is a surface-mounted LED luminaire. A Ø200 mm cylindrical surface-mounted luminaire, 137 mm high; 10–30 W LED module, spun aluminium body. With spun aluminium body and plexiglass diffuser, it offers IP20 protection, Ra>80 colour rendering, 2700K–6500K and Tunable White colour temperatures and an emergency kit option. It is used on concrete or timber ceilings without a suspended ceiling, in offices, shops and homes; it comes with a 3-year warranty.

POWER  
**10–30 W**

LUMINOUS FLUX  
**1,500–4,000  
lm**

EFFICACY  
**133–150 lm/W**

COLOUR  
RENDERING  
**Ra > 80**

IP RATING  
**IP20**

WARRANTY  
**3 years**

IP  
**20**


CE

CRI>80

## KEY FEATURES

- Spun aluminium body
- Die-cast aluminium front frame
- Plexiglass diffuser
- Electrostatic powder coated
- Optional emergency kit, 1–3 hours
- 10, 15, 20 and 30 W LED module; 2700K–6500K and Tunable White

## DIMENSIONS (MM)

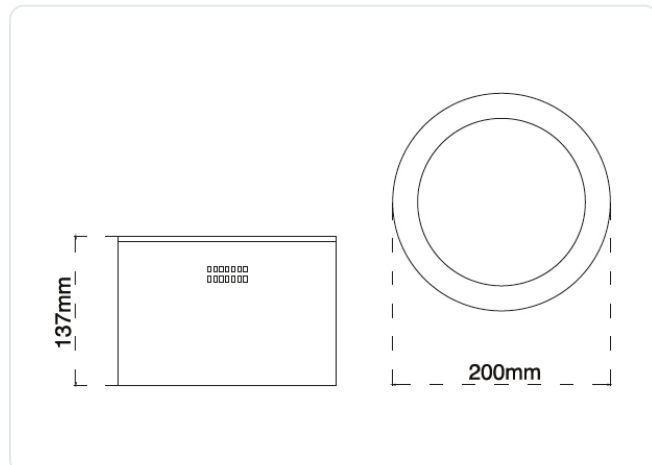

## TECHNICAL DATA

|               |                                        |
|---------------|----------------------------------------|
| IP rating     | IP20                                   |
| Housing       | Spun aluminium body                    |
| Mounting      | Surface-mounted                        |
| LED type      | SMD mid-power LED                      |
| LED           | Samsung, Bridgelux, Lumileds, Ledvance |
| Optics        | Plexiglass diffuser                    |
| Input voltage | 220–240 V AC                           |
| Dimensions    | Ø200 × 137 mm                          |
| Weight        | 1.29 kg                                |
| Warranty      | 3 years                                |

# Tondo Surface-Mounted Luminaire 2

Product code: 20 01 IC SU 010

## LIGHT AND POWER OPTIONS

| Code                   | LED                                    | Power | Luminous flux | Efficacy | CCT   | CRI     |
|------------------------|----------------------------------------|-------|---------------|----------|-------|---------|
| 20 01 IC SU 010-10-830 | Samsung, Bridgelux, Lumileds, Ledvance | 10 W  | 1,500 lm      | 150 lm/W | 3000K | Ra > 80 |
| 20 01 IC SU 010-15-830 | Samsung, Bridgelux, Lumileds, Ledvance | 15 W  | 2,200 lm      | 147 lm/W | 3000K | Ra > 80 |
| 20 01 IC SU 010-20-830 | Samsung, Bridgelux, Lumileds, Ledvance | 20 W  | 3,000 lm      | 150 lm/W | 3000K | Ra > 80 |
| 20 01 IC SU 010-30-830 | Samsung, Bridgelux, Lumileds, Ledvance | 30 W  | 4,000 lm      | 133 lm/W | 3000K | Ra > 80 |

## CUSTOMISATION

### COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

5000K

6500K

Tunable White

### DRIVER AND CONTROL

- Standard driver (on/off)
- Emergency kit, 1 hour
- Emergency kit, 3 hours

### MOUNTING



Surface

### HOUSING COLOUR



01 White



03 Black



06 Any RAL colour



### Up-to-date information and all options

<https://harmonyels.com/en/product/tondo-siva-ustu-armatur-2>