

Vela Driver-Socket Track Spotlight 1

Product code: 20 01 IC RS 005



Vela Driver-Socket Track Spotlight 1 is a COB LED track spotlight. A 10–42 W COB LED track spotlight for three-phase track, with a 359° rotating head, ballshape reflector and narrow, medium or wide beams. With die-cast aluminium body with heat sink and narrow, medium and wide beam reflector options, it offers IP20 protection, Ra>80 colour rendering, 2700K–6500K and Tunable White colour temperatures and an emergency kit option. It is mounted on lighting track for product and wall accents in shops, showrooms, galleries and museums; it comes with a 3-year warranty.

POWER
10–42 W

LUMINOUS FLUX
**1,200–5,000
lm**

EFFICACY
110–123 lm/W

COLOUR
RENDERING
Ra > 80

IP RATING
IP20

WARRANTY
3 years

IP
20


CE

CRI>80

KEY FEATURES

- Housing with die-cast aluminium heat sink
- High-purity aluminium ball-shape reflector
- Narrow, medium and wide beam reflector options
- Driver integrated in the track adaptor
- Tempered protective glass
- Electrostatic powder coated

DIMENSIONS (MM)

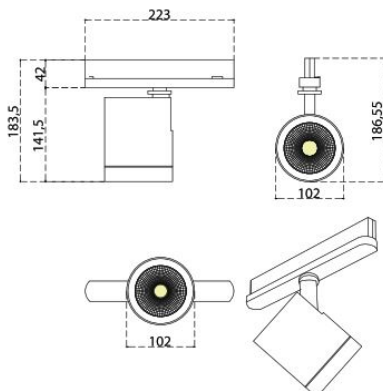

TECHNICAL DATA

IP rating	IP20
Housing	Housing with die-cast aluminium heat sink
Mounting	Track (single/three-phase)
LED type	COB LED
LED	Samsung, Bridgelux, Lumileds, Ledvance
Optics	Narrow, medium and wide beam reflector options
Input voltage	220–240 V AC
Dimensions	223 × 102 × 184 mm
Weight	1.65 kg
Warranty	3 years

Vela Driver-Socket Track Spotlight 1

Product code: 20 01 IC RS 005

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 IC RS 005-10-830	Samsung, Bridgelux, Lumileds, Ledvance	10 W	1,200 lm	120 lm/W	3000K	Ra > 80
20 01 IC RS 005-20-830	Samsung, Bridgelux, Lumileds, Ledvance	20 W	2,200 lm	110 lm/W	3000K	Ra > 80
20 01 IC RS 005-30-830	Samsung, Bridgelux, Lumileds, Ledvance	30 W	3,500 lm	117 lm/W	3000K	Ra > 80
20 01 IC RS 005-35-830	Samsung, Bridgelux, Lumileds, Ledvance	35 W	4,300 lm	123 lm/W	3000K	Ra > 80
20 01 IC RS 005-42-830	Samsung, Bridgelux, Lumileds, Ledvance	42 W	5,000 lm	119 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

5000K

6500K

Tunable White

special spectra for meat, fish and bread

AIMING

ADJUSTABLE

359°

DRIVER AND CONTROL

- Standard driver (on/off)
- Emergency kit, 1 hour
- Emergency kit, 3 hours

MOUNTING



Track

ACCESSORIES



Honeycomb louvre Barn doors

HOUSING COLOUR



01 White



03 Black



06 Any RAL colour



Up-to-date information and all options

<https://harmonyels.com/en/product/vela-surucu-soketli-ray-spotu-1>