HARMONY
Energy Lighting Solutions

EMERGENCY EXIT SIGN

YF-EXST1

Product code: 20 01 AC YN 002



Professional emergency lighting for orientation

YF-EXST1 is a single- or double-sided SMD LED exit sign whose direction labels on a clear acrylic face are visible from 20 metres. It can be ceiling-, wall- or pendant-mounted and operates for up to 3 hours during a power failure. It marks escape directions in offices, shopping centres, hospitals, hotels and industrial buildings.

VISIBLE DISTANCE	EMERGENCY DURATION	POWER
20 m	**1–3 hours**	**5 W**

IP
20

KEY FEATURES

- Single or double faced
- SMD LED application, side lighting
- Green LED battery charge indicator
- High temperature resistant industrial grade 1.2 V Ni-Cd / Ni-MH battery
- Battery overcharge and discharge protection
- Transparent plexiglass with directional sign labels
- Ceiling, wall or suspended ceiling mounting; surface or flush
- Tolerance to operating temperatures between –10 °C and +40 °C

APPLICATION AREAS

Office · Hotel · Hospital · Industrial

Ideal for LED lighting systems in offices, hotels, hospitals and industrial facilities, ensuring safe evacuation during power outages.

TECHNICAL DATA

Model	YF-EXST1
Brand	Albex
Input voltage	220–240 V AC
Maximum power	5 W
Battery	1,2 V Ni-Cd / Ni-MH
Emergency duration	1–3 hours
Operating frequency	50–60 Hz
Operating temperature	–10 °C … +40 °C
Lamp type	LED
Working mode	Continuous
Protection class	IP20
Visible distance	20 m
Sign size	130 × 251 mm

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.


Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com

YF-EXST1


Product code: 20 01 AC YN 002

DIMENSIONS (MM)

SURFACE MOUNTED

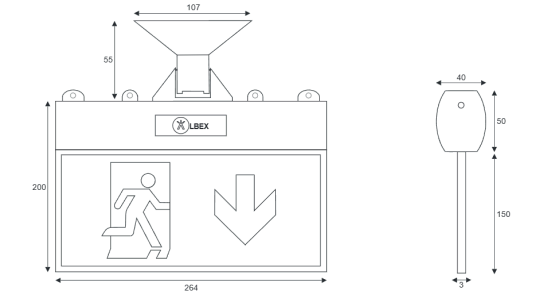

FLUSH

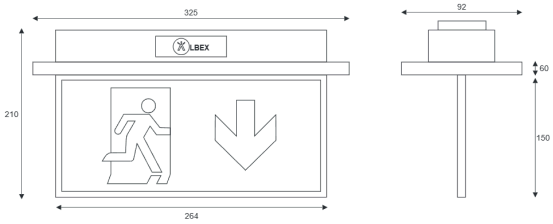

Up-to-date information and all options
https://harmonyels.com/en/product/yf-exst1

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com