HARMONY
Energy Lighting Solutions

EMERGENCY LIGHTING KIT

YFB-24

Product code: 20 01 AC KT 002



Professional emergency lighting solution for 24 V DC constant current LED luminaires

YFB-24 is an emergency conversion kit for 24 V DC constant-voltage LED luminaires, supporting LED loads up to 100 W. During a power failure it runs for up to 3 hours on a 4.8 V Ni-Cd/Ni-MH battery, with full brightness for the first 90 minutes, and is protected against over-discharge and reverse polarity. It is used with LED strips and linear luminaires for escape-route lighting.

MAX. POWER	EMERGENCY DURATION	BATTERY
100 W	**1–3 hours**	**4,8 V Ni-Cd / Ni-MH**

IP 20

KEY FEATURES

- For 24 V DC LED luminaires
- Maximum 100 W LED load support
- Provides uninterrupted illumination for 1 to 3 hours during power outages
- Constant output at full brightness for the first 90 minutes
- Over-discharge & reverse polarity protection
- Optional test button with green LED charge indicator
- Tolerance to operating temperatures between –10 °C and +50 °C

APPLICATION AREAS

Office Hotel Hospital Industrial

Ideal for LED lighting systems in offices, hotels, hospitals and industrial facilities, ensuring safe evacuation during power outages.

TECHNICAL DATA

Model	YFB-24
Brand	Albex
Input voltage	220–240 V AC
Output voltage	24 V DC
Maximum power	100 W
Battery	4,8 V Ni-Cd / Ni-MH
Emergency duration	1–3 hours
Operating frequency	50–60 Hz
Operating temperature	–10 °C … +50 °C
Lamp type	24 V DC LED
Standards	EN 61347-1, EN 61347-2-13, EN 55015, EN 61547

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com

HARMONY
Energy Lighting Solutions


YFB-24

Product code: 20 01 AC KT 002


BATTERY OPTIONS

Product code	Duration	Battery	Battery code
YFB-24 14 1H	1 h	4.8 V / 1200 mAh	YFP14
YFB-24 24 2H	2 h	4.8 V / 2200 mAh	YFP24
YFB-24 34 3H	3 h	4.8 V / 4000 mAh	YFP34

DIMENSIONS (MM)

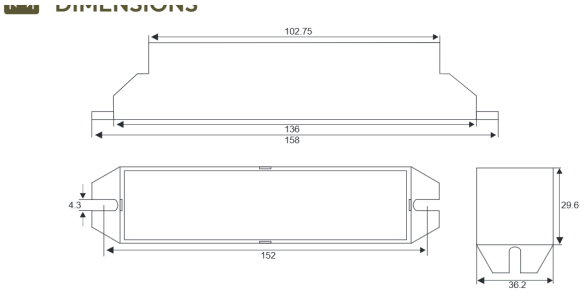

WIRING DIAGRAM

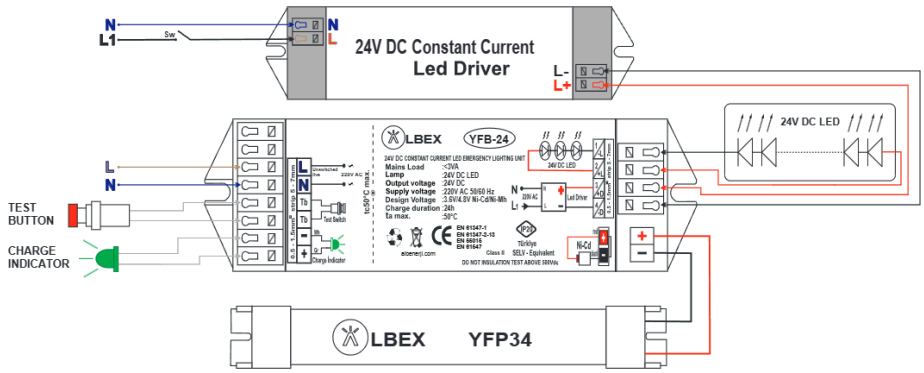

Up-to-date information and all options
https://harmonyels.com/en/product/yfb-24

Technical values are subject to a ±10% tolerance. Efficacy is calculated by dividing luminous flux by nominal power. Harmony ELS reserves the right to make changes to products without prior notice.

Harmony ELS Energy Lighting Solutions
Adnan Kahveci Mahallesi Kuştepe Caddesi Onurkent Sitesi A4 Blok No:29/D 34528 Beylikdüzü / İstanbul
+90 538 428 9559 · info@harmonyels.com · harmonyels.com