

Pico Recessed Round Mini Spot 1

Product code: 20 01 IC AS 036



Pico Recessed Round Mini Spot 1 is a recessed LED spotlight. A round recessed spotlight; 10–15 W COB LED, Ø74 mm ceiling cut-out. With die-cast aluminium body with heat sink and frame and high-purity aluminium ballshape reflector, it offers IP20 protection, Ra>80 colour rendering, 2700K–6500K and Tunable White colour temperatures and an emergency kit option. It is used for accent and general lighting in suspended ceilings of shops, hotels, offices and homes; it comes with a 3-year warranty.

POWER
10–15 W

LUMINOUS FLUX
**1,200–1,800
lm**

EFFICACY
120 lm/W

COLOUR
RENDERING
Ra > 80

IP RATING
IP20

WARRANTY
3 years

IP
20


CE

CRI>80

KEY FEATURES

- Die-cast aluminium body with heat sink and frame
- High-purity aluminium ball-shape reflector
- Electrostatic powder coated
- Optional emergency kit, 1–3 hours
- Special-spectrum LED option for meat, fish and deli
- 2700K–6500K colour temperatures and Tunable White; CRI 80 or CRI 90

DIMENSIONS (MM)

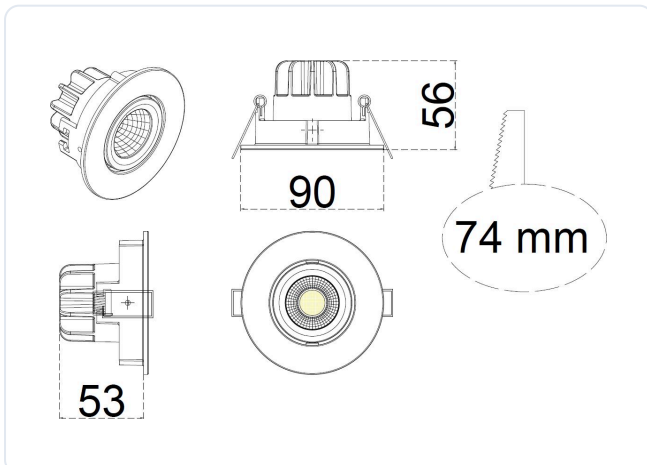

TECHNICAL DATA

IP rating	IP20
Housing	Die-cast aluminium body with heat sink and frame
Mounting	Recessed
LED type	COB LED
LED	Samsung, Bridgelux, Lumileds, Ledvance
Optics	High-purity aluminium ball-shape reflector
Input voltage	220–240 V AC
Dimensions	Ø90 × 56 mm
Cut-out	Ø 74 mm
Weight	0.35 kg
Warranty	3 years

Pico Recessed Round Mini Spot 1

Product code: 20 01 IC AS 036

LIGHT AND POWER OPTIONS

Code	LED	Power	Luminous flux	Efficacy	CCT	CRI
20 01 IC AS 036-10-830	Samsung, Bridgelux, Lumileds, Ledvance	10 W	1,200 lm	120 lm/W	3000K	Ra > 80
20 01 IC AS 036-15-830	Samsung, Bridgelux, Lumileds, Ledvance	15 W	1,800 lm	120 lm/W	3000K	Ra > 80

CUSTOMISATION

COLOUR TEMPERATURE

special spectra for meat, fish and bread

DRIVER AND CONTROL

- Standard driver (on/off)
- Emergency kit, 1 hour
- Emergency kit, 3 hours

MOUNTING



Recessed

HOUSING COLOUR



Up-to-date information and all options
<https://harmonyels.com/en/product/pico-ankastre-yuvarlak-mini-spot-1>